

HİDROLİK ÜÇ YOLLU KÜRESEL VANALAR

DDF3 SERIES




Speciality


Mineral oil	ISO 6743/4
Oil viscosity	15-250 mm ² /s
Max contamination index with filter	ISO 4406:1999
Oil temperature	-20°C +80°C
Ambient temperature	-20°C +50°C
Max internal leakage	7 drops-min 200 bar

It is necessary a filter use to protect the valve (advised filtration 15 µm)

Control Port(s)

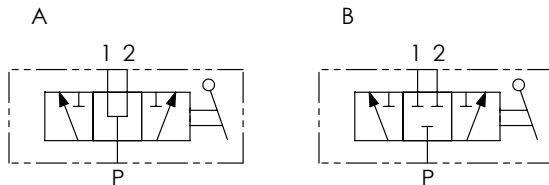


Performance

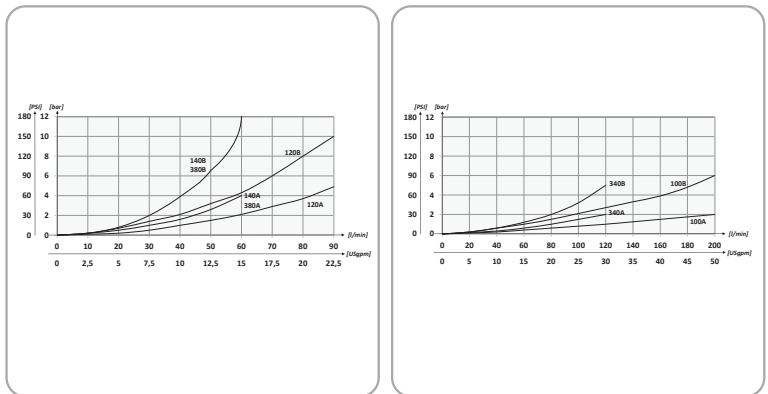

Ordering Code

1	2	3
DDF3		

Dimensions

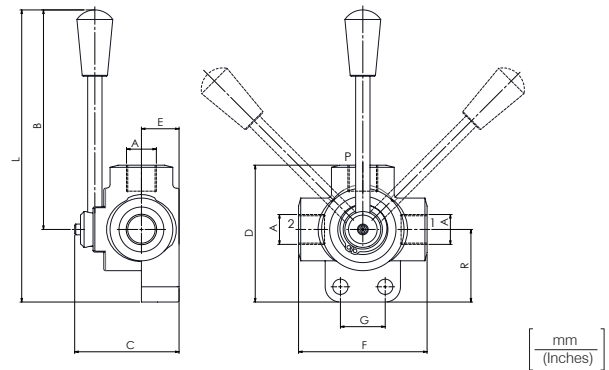

Technical Characteristics

Type	A	Max flow l/minUSgpm	Max pressure bar/PSI	B	C	D	E	F	G	H	L	R	Approx weight kg/lb
DDF3 140	BSPP 1/4	60 (15.8)	350 (5075)	115 (4.53)	57 (2.24)	75,5 (2.97)	21 (0.83)	70 (2.76)	25 (0.98)	8,5 (0.33)	155,5 (6.12)	32 (1.26)	0,8 (1.8)
DDF3380	BSPP 3/8												
DDF3120	BSPP 1/2	90 (23.8)											
DDF3340	BSPP 3/4												
DDF3100	BSPP 1	200 (52.8)											
				</									