
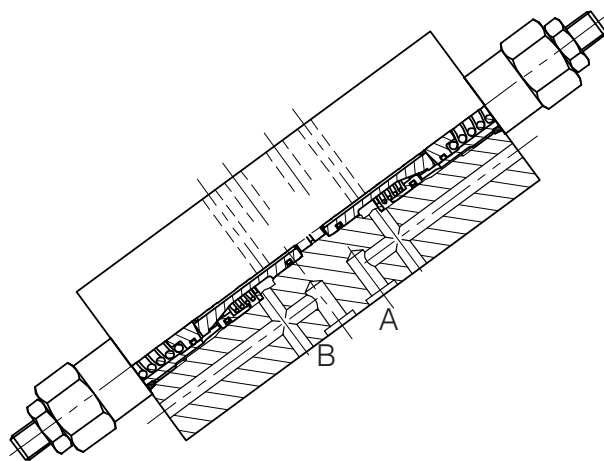


OWC-DE-L6-...


SINGLE COUNTERBALANCE WITH SANDWICH INSTALLATION (CETOP)

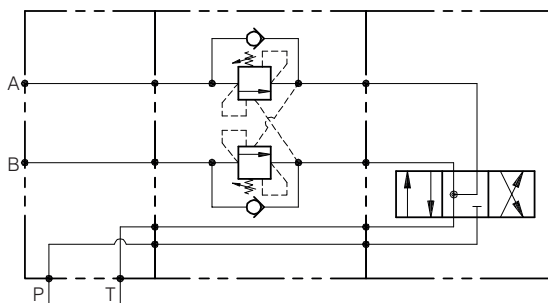

Performance

Rated size	DN 6
Min/Max flow-rate	1/50 l/min - 0.26/12.5 GPM
Max peak pressure	350 bar - 5075 PSI
Max setting pressure	350 bar - 5075 PSI
Standard pilot ratio	4.25 : 1
Room temperature	-30°C + 50°C
Oil temperature	-30°C + 80°C
Recommended filtration	30 micron
Weight	
Weight	

Performance Details

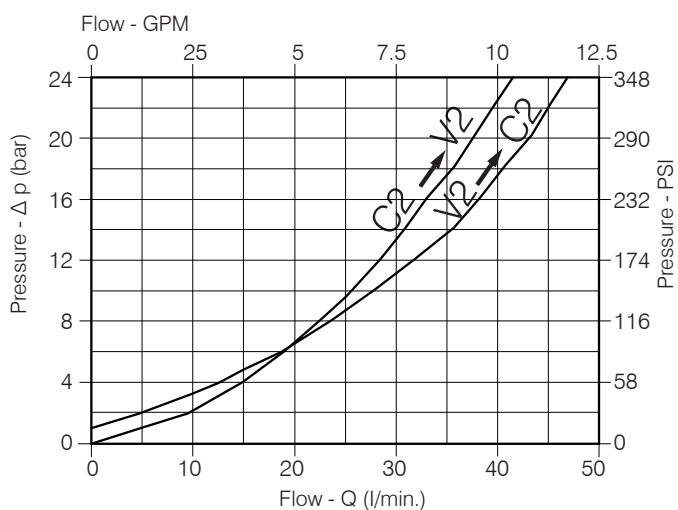

NOTE:


Valve should be set at 1.3 times load induced pressure.

EXAMPLE:

Max working pressure: $350 \text{ bar} / 1.3 = 270 \text{ bar}$

OWC-DE-L6-...


Hydraulic valves and integrated components

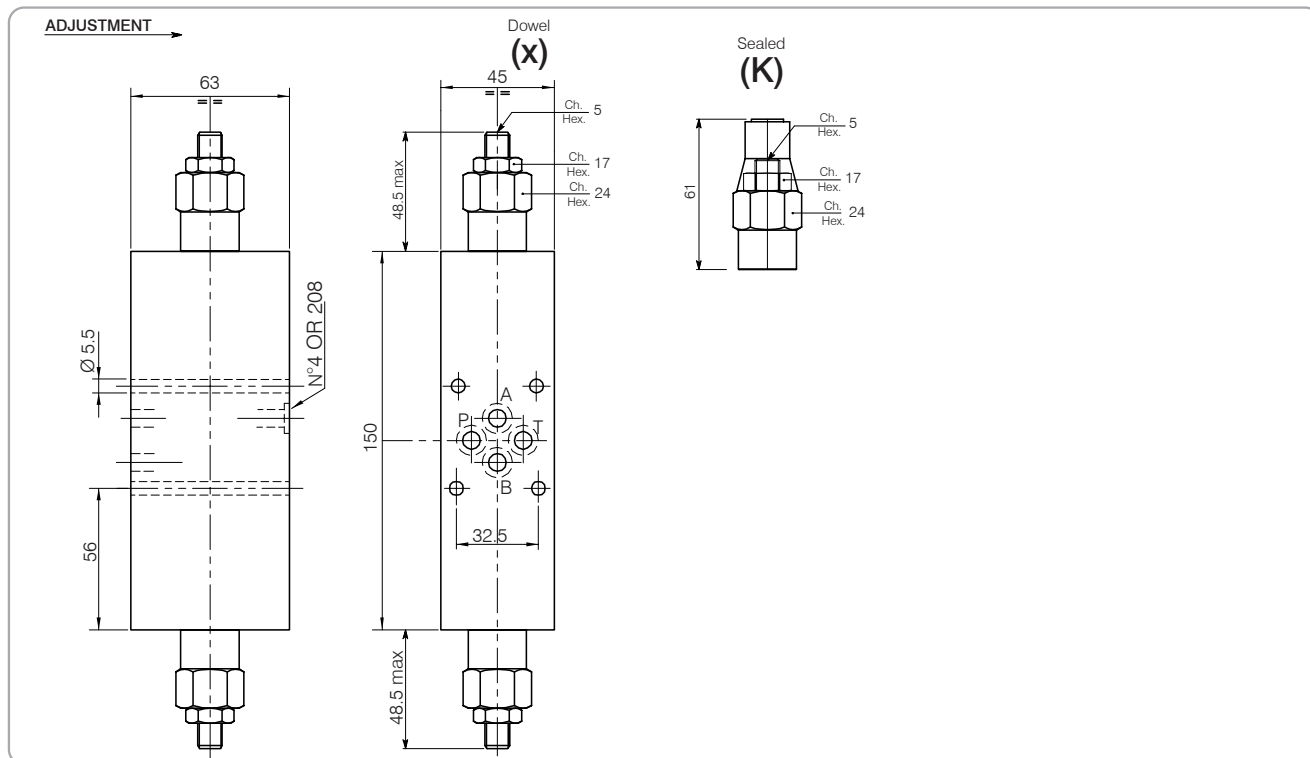

Dimensions

Setting Range	Flange Type	Max flow-rate
		l/min - GPM
226	CETOP 03	50-12.5

TYPICAL CIRCUIT EXAMPLE

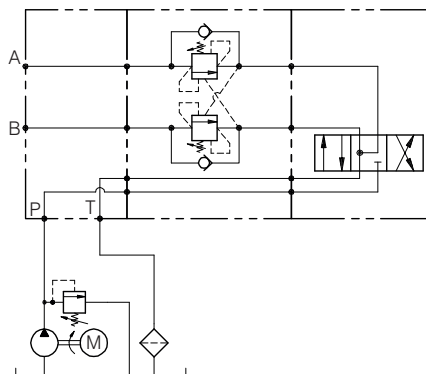

Ordering Code

N 0 1 . 2 2 6 . 0 . X 0 . A

Setting Range	
226	
Setting range 60 ÷ 350 bar (yellow spring)	
Std. bar setting Q=5 l/1') (250) bar	Pressure rise - turn of screw (90)

Adjustment
X = Dowel
K = Sealed

Pilot Ratios
0 = 4.25 : 1

Body
Zinc plated
Steel

226 Available aluminium body without "A"