


CRG Series



FUNCTION

Rectangle checks allow free flow from single direction only the flow will be obstructed if from opposite direction

SYMBOL



TECHNICAL DATA

MODEL NUMBER	MAX.FLOW LPM/GPM	MAX.PRESSURE KGF/CM (PSI)	CRACKING PRESSURE KGF/CM (PSI)
CRG-03	40 (10.6)	210(3000)	0.35 (5 PSI) 3.5 (50 PSI)
CRG-06	125 (33)		
CRG-10	250 (66)		

ORDERING CODE

CRG -- 03 -- 07 -- 50

Desing Number

Cracking Pressure

07:0.35 Kgf/Cm (5 PSI)

50:3.50 Kgf/Cm (50 PSI)

Port Size

03:3/8"


06:3/4"

10:1-1/4"

Mounting

G:For Subplate Mounting

CRG Series

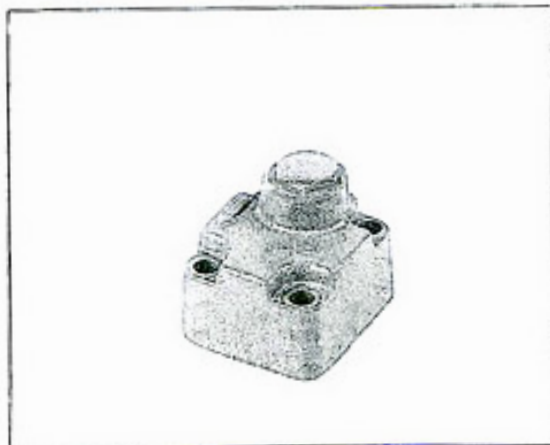

FUNCTION

RECTANGLE CHECKS ALLOW FREE FLOW FROM SINGLE DIRECTION ONLY THE FLOW WILL BE OBSTRUCTED IF FROM OPPOSITE DIRECTION.

SYMBOL



TECHNICAL DATA

MODEL NUMBER	MAX. FLOW LPM/GPM	MAX. PRESSURE KGF/CM ² (PSI)	CRACKING PRESSURE KGF/CM ² (PSI)
CRG-03	40 (10.6)	210 (3000)	0.35 (5 PSI) 3.5 (50 PSI)
CRG-06	125 (33)		
CRG-10	250 (66)		

ORDERING CODE

CRG -- 03 -- 07 -- 50

DESIGN NUMBER

CRACKING PRESSURE:
 07: 0.35 KGF/CM² (5 PSI)
 50: 3.50 KGF/CM² (50 PSI)

PORT SIZE:
 03: 3/8"
 06: 3/4"
 10: 1-1/4"

MOUNTING:
 G: FOR SUBPLATE MOUNTING