


Hidrolik Hat Tipi Valfler ve Katriçler/ Hydraulic Inline Valves and Cables

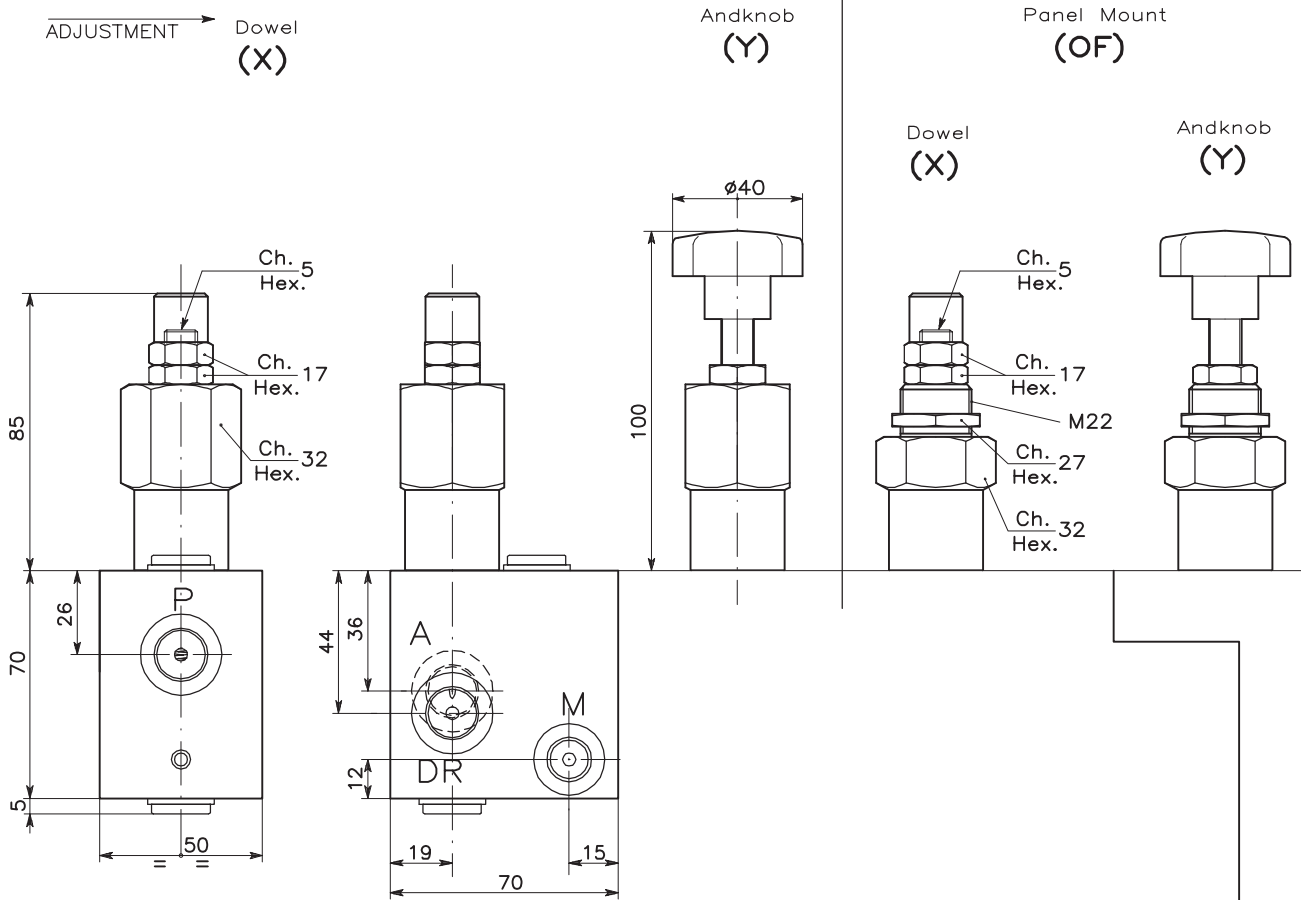

VALVE CODE		Port size P-A-DR GAS (BSPP)	Port size M GAS (BSPP)
VRP-14-L-Δ-*	49	1/4"	1/4"
VRP-38-L-Δ-*	50	3/8"	1/4"

TIPI					
Setting range 5 ÷ 100 bar (Colour blue)		Setting range 10 ÷ 210 bar (Colour green)		Setting range 25 ÷ 350 bar (Colour yellow)	
(Q=5 l/1')	Std. bar setting (mode at 5 l/1')	(Q=5 l/1')	Std. bar setting (mode at 5 l/1')	(Q=5 l/1')	Std. bar setting (mode at 5 l/1')
80 bar	Pressure rise turn of screw (--)	180 bar	Pressure rise turn of screw (--)	320 bar	Pressure rise turn of screw (--)
A		B		C	

Adjustment	
*	
Dowel	X
Handknob	Y

2 0 . 0 F

ORDERING CODE

Panel mount only

Hidrolik Hat Tipi Valfler ve Katriçler/ Hydraulic Inline Valves and Cables**Teknik Özellikler / Technical Specifications**

DELİK ÖLÇÜSÜ / PORT SIZE				
ADI / DENOMINATION	A	P	DR	M
VRP / 14 - L	1/4"	1/4"	1/4"	1/4"
VRP / 38 - L	3/8"	3/8"	3/8"	1/4"

Max. Çalışma Basıncı Max. Working Pressure	350 bar	Max. Debi Max. Flow	45 l/ min.
---	---------	------------------------	------------