

MODULAR RESTRICTIVE VALVE



Technical Specification

Specification	02	03
Maximum pressure (Bar)	315	
Max. Flow (L/min)	30	50
Working fluid	Mineral oil; phosphate-ester	
Fluid temp. (°C)	-20~70	
Viscosity (mm²/s)	2.8~380	
Cleanliness	The maximum allowable cleanliness of the oil should be according to 9th degree of Standard NAS 1638. It is suggested that the minimum filter rating should be $\beta_{10} \geq 75$.	

Model Description

WDL-* * / * 70 *

Modular restrivtive valve

Specification
02 : DN6
03 : DN10

P : P Pipeline
T : T Pipeline
A : A Pipeline
B : B Pipeline
W : AB Pipeline


Remarks

Serial number


Seal material
Omit : NBR Seals
V : FPM Seals

Code Symbol


WDL --*-A




WDL --*-B




WDL --*-P



WDL --*-T




WDL --*-W




MODULAR RESTRICTIVE VALVE

External Dimensions

WDL-02-W/...

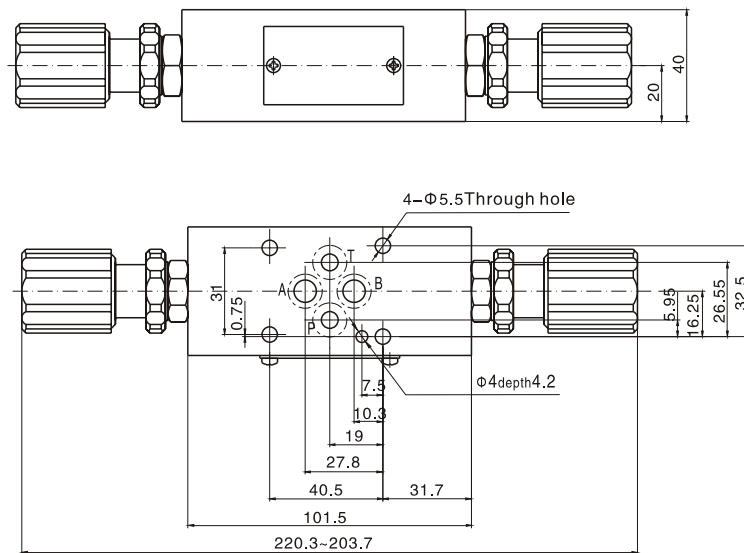

WDL-03-A/...

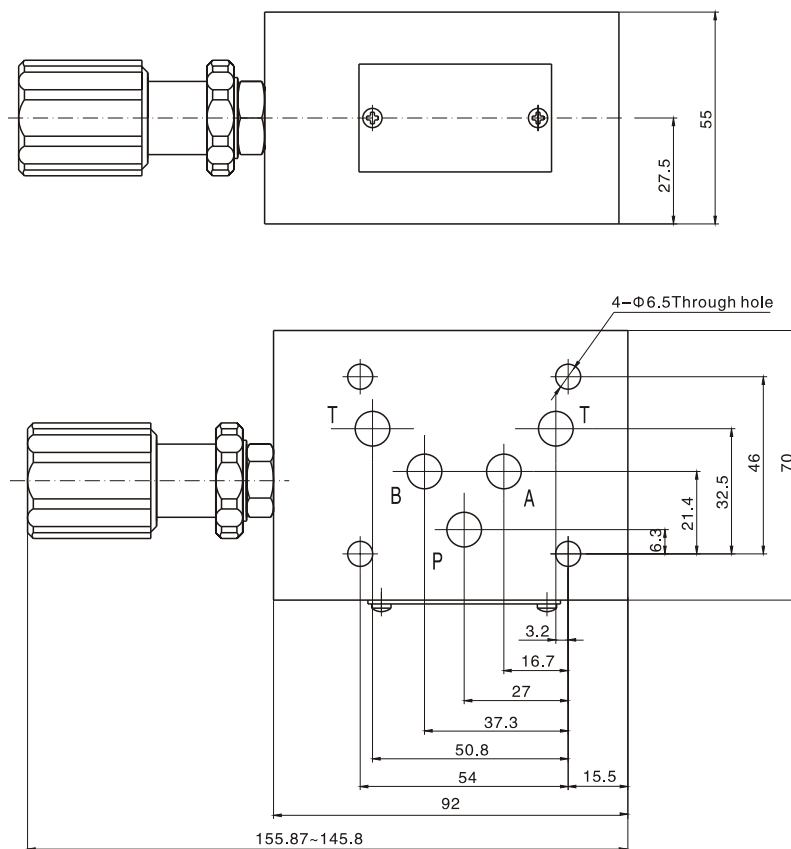


Notice: The surface, connecting with the valve, should be Ra0.8 roughness, and 0.01/100mm flatness.


MODULAR RESTRICTIVE VALVE

External Dimensions

WDL-03-P,B,T/...

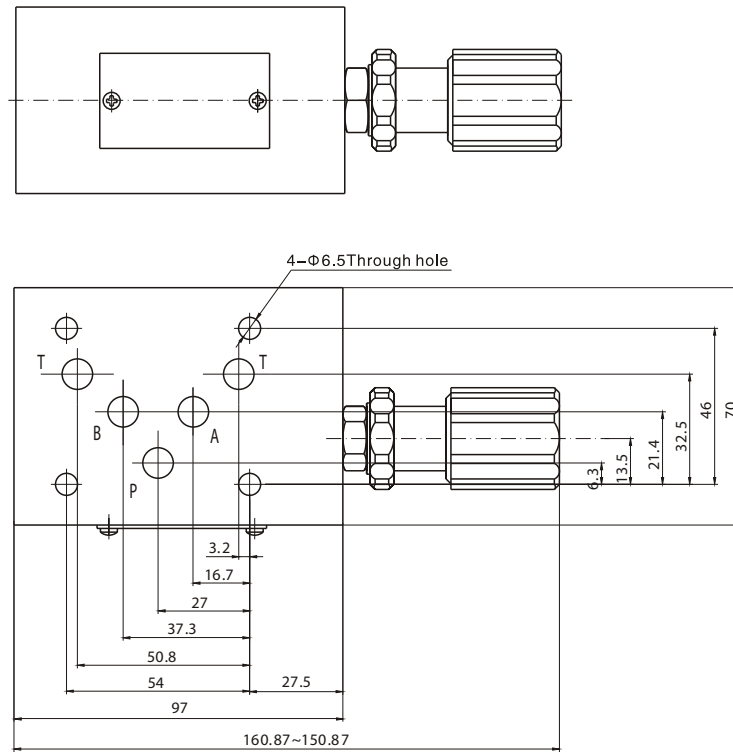

WDL-03-W/...

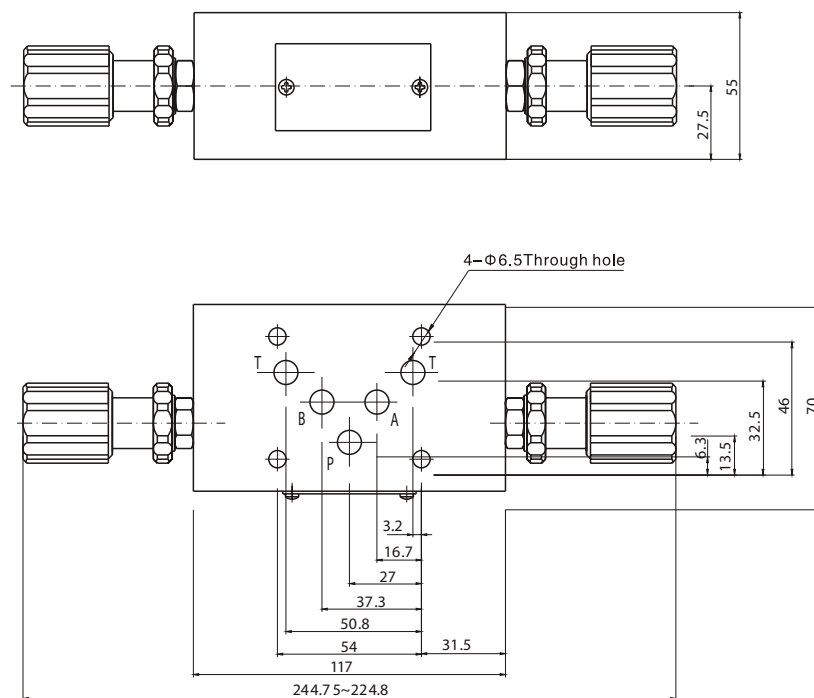

Notice: The surface, connecting with the valve, should be Ra0.8 roughness, and 0.01/100mm flatness.