

MODULAR RELIEF VALVE-70 SERIES



Technical Specification

Specification	02	03
Maximum working pressure (Bar)	315	
Max. Flow (L/min)	35	70
Working fluid	Mineral oil; phosphate-ester	
Fluid temp. (°C)	-20~70	
Viscosity (mm²/s)	12~380	
Working press (Bar)	70	140 210 315
Cleanliness	The maximum allowable cleanliness of the oil should be according to 9th degree of Standard NAS 1638. It is suggested that the minimum filter rating should be $\beta_{10} \geq 75$.	

Model Description

WMR - * - * - * / * 70 *

Modular relief valve

Specification
02 : DN 06
03 : DN 10

P : P Pipeline relief
A : A Pipeline relief
B : B Pipeline relief
W : AB Pipeline relief

Working pressure
50 : to 50bar
100 : to 100 bar
200 : to 200 bar
315 : to 315 bar


Remarks

Serial number

Seal material
Omit : NBR Seals
V : FPM Seals

8 Handle


Code Symbol

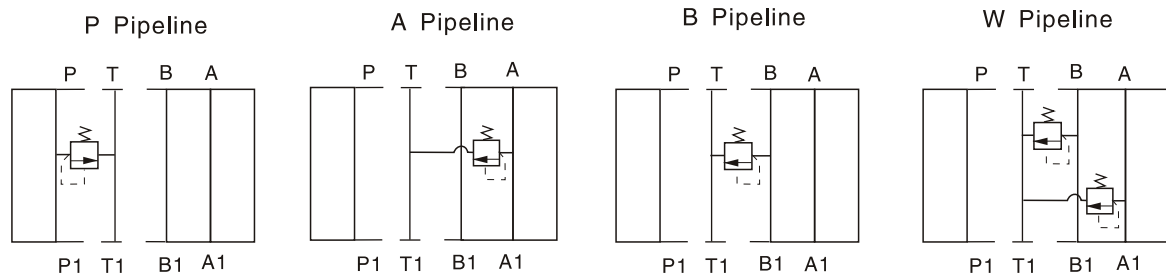


MODULAR RELIEF VALVE-70 SERIES

02 External Dimensions


WMR-02-A

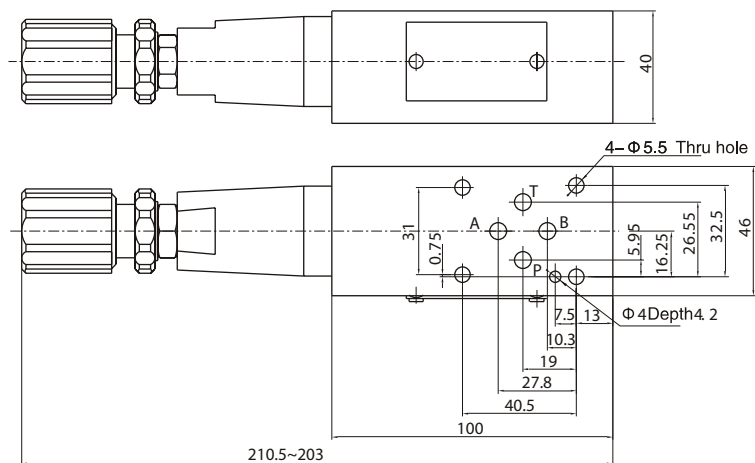

WMR-02-B,P

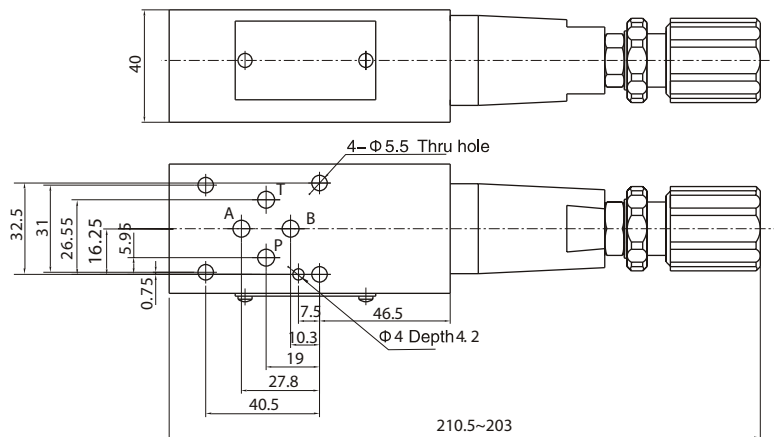


WMR-02-W

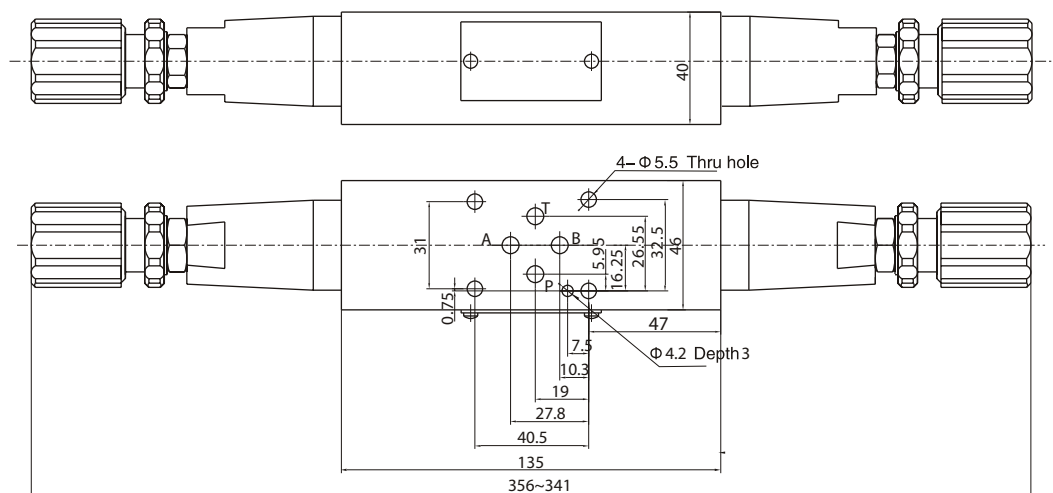


MODULAR RELIEF VALVE-70 SERIES

03 External Dimensions

WMR-03-A...

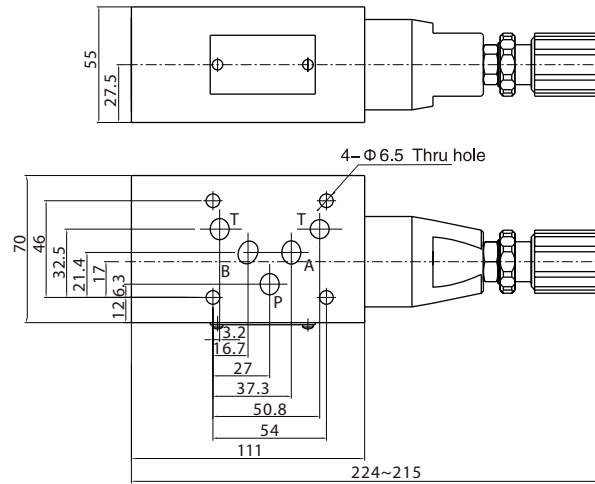

WMR-03-B,P...

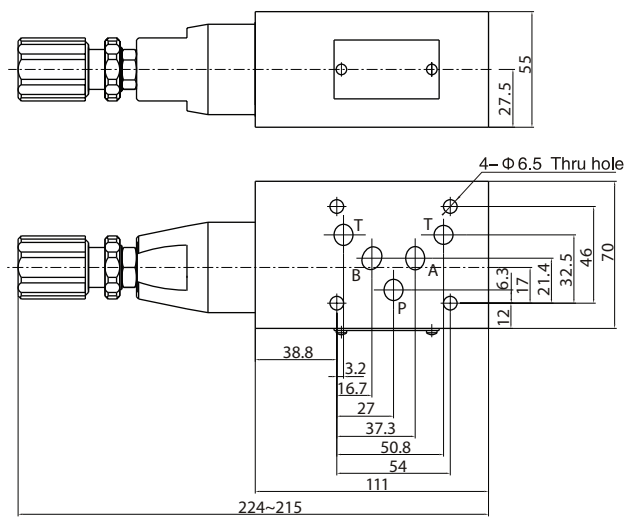

WMR-03-W...

