


FRC Series FR.L combination



Dimension (mm)

Model	A	B	C
FRC-MIDI-02	140	268	55
FRC-MIDI-03			
FRC-MIDI-04			
FRC-MINI-01	104	210	40
FRC-MINI-02			
FRC-MINI-03			

Symbol

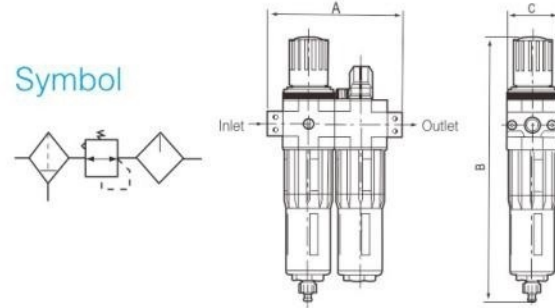

Technical Specification

Model	Components		Port Size Rp(PT)	Filter Accuracy	Max. Flow L/min(ANR)	Pressure Range MPa	Options/Description
	Filter-Regulator	Lubricator					
FRC-MINI	01	LFR-MINI	LOE-MINI	1/8"	700	0.15~1.2	Manual drain type Ambient Temperature: -5~60°C(Not Frozen) Suggested Lubricating Oil: Turbine No. 1 Oil(ISO VG32) Optional filter accuracy 5 μ m
	02			1000			
	03			1200			
FRC-MIDI	02	LFR-MIDI	LOE-MIDI	1/4"	1500		
	03			2000			
	04			2600			


LF Series Air filter



Dimension (mm)

Model	A	B	C
LF-MIDI-02	85	195	55
LF-MIDI-03			
LF-MIDI-04			
LF-MINI-01	64	161	40
LF-MINI-02			
LF-MINI-03			

Symbol

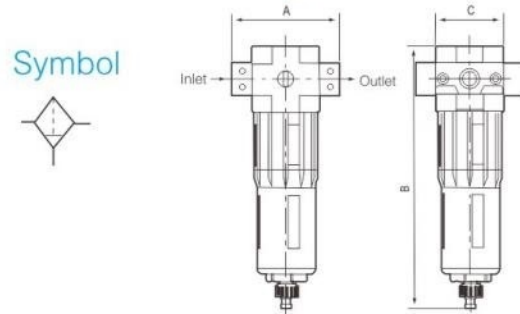

Technical Specification

Model	Port Size Rp(PT)	Filter Accuracy	Max. Flow L/min(ANR)	Pressure Range MPa	Options/Description
LF-MINI	01	40 μ m	1000	0.15~1.2	Manual drain type Ambient Temperature: -5~60°C(Not Frozen) Optional filter accuracy 5 μ m
	02		1200		
	03		1400		
LF-MIDI	02		1900		
	03		2700		
	04		3000		


LR Series Air Regulator



Dimension (mm)

Model	A	B	C
LR-MIDI-02	85	128	55
LR-MIDI-03			
LR-MIDI-04			
LR-MINI-01	64	96	40
LR-MINI-02			
LR-MINI-03			

Symbol

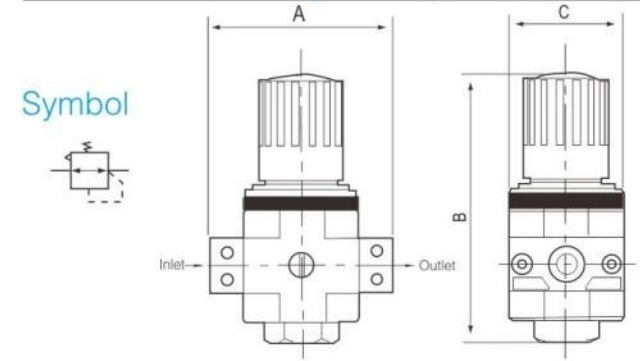

Technical Specification

Model	Port Size Rp(PT)	Max. Flow L/min(ANR)	Pressure Range MPa	Options/Description
LR-MINI	01	1000	0.15~1.2	Ambient Temperature: -5~60°C(Not Frozen)
	02	1600		
	03	1800		
LR-MIDI	02	2200		
	03	3300		
	04	4000		


LFR Series Air filter-regulator



Dimension(mm)

Model	A	B	C
LFR-MIDI-02	85	268	55
LFR-MIDI-03			
LFR-MIDI-04			
LFR-MINI-01	64	210	40
LFR-MINI-02			
LFR-MINI-03			

Symbol

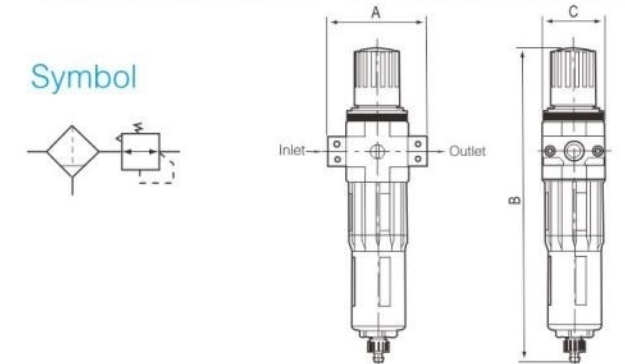

Technical Specification

Model	Port Size Rp(PT)	Filter Accuracy	Max. Flow L/min(ANR)	Pressure Range MPa	Options/Description
LFR-MINI	01	40 μ m	750	0.15~1.2	Manual drain type Ambient Temperature: -5~60°C(Not Frozen) Optional filter accuracy 5 μ m
	02		1400		
	03		1600		
LFR-MIDI	02		2000		
	03		3100		
	04		3400		